


# 19" patch panel Solarix 24x RJ45 CAT6 UTP 1U

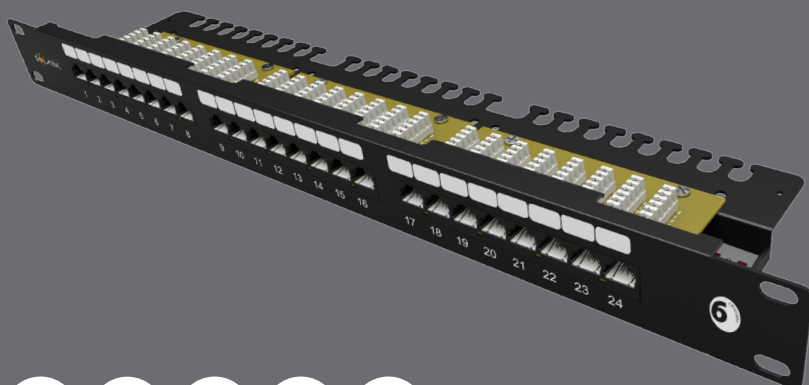

Product number:  
24000050

Type number:  
SX24L-6-UTP-BK-N

EAN barcode:  
8595684704341



## Key features

- Quality 19" unshielded category 6/Class E patch panel
- Designed for ethernet protocols, including 2.5GBASE-T and 5GBASE-T
- With management bar
- 24 ports RJ45 with 50 µin gold contact plating
- Dual IDC termination block 110/Krone type (both T568A and T568B wiring)
- The patch panel meets the ISO/IEC 11801, EN 50173, and ANSI/TIA 568.2-E cabling standards
- The colour of the patch panel is black
- 1U size

## Cabling standards

General standards

EN 50173-1, EN 50173-2, ISO/IEC 11801-1, ISO/IEC 11801-2, ANSI/TIA 568.2-E

Product standards

EN 60603-7-4

## Supported protocols

	10BASE-T	100BASE-TX	1000BASE-T	2.5GBASE-T	5GBASE-T
Supported by the SX24L-6-UTP-BK-N patch panel	YES	YES	YES	YES	YES

## Supported PoE

	802.3af	802.3at
PoE type	Type 1	Type 2
Maximum current	350 mA	600 mA
No. of pairs used	2	2
Supported by the SX24L-6-UTP-BK-N patch panel	YES	YES



## Physical parameters

Patch panel construction	UTP
Number of ports	24x RJ45 8p8c
Min. port lifetime	1000 connections/disconnections
Contacts plating	50 µin gold
Termination block type	dual 110/Krone
Number of terminations	200
Size and type of conductor	AWG 26 – 22, solid wire
Material of non-metallic parts	FR plast podle UL94-0
Patch panel body colour	black
Number of units	1U
Height	44 mm
Width	484 mm
Depth	95 mm


## Operation and storage

Max. operating humidity	93%
Operating temperature	-10 to 60 °C
Storage temperature	-40 to 70 °C

## Logistic parameters

Patch panel packaging size (h x w x d)	75 mm x 510 mm x 110 mm, carton box
Weight	1.1 kg
Included in the package	1x patch panel, 4x M6 mounting kit, 24x plastic strap
Master packaging	10x panel
Master packaging size (h x w x d)	230 mm x 515 mm x 400 mm, carton box
Batch marking	yes (on the product, its packaging and on the transport master box)
Batch and product numbers barcode	IDAutomation Code 39, ANSI/ISO/AIM specification
EAN code type	EAN-13

## Patch panel label

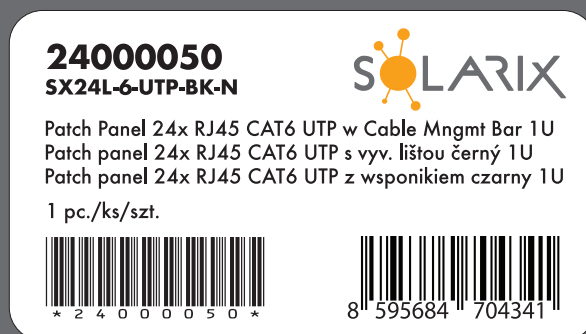

## Solarix warranties

Standard warranty	5 years
System warranty	30 years



## Related products

Product Number	Type Number	Description
26000001	SXKD-6-UTP-PVC	Installation Cable Solarix CAT6 UTP PVC Eca 500m/reel
26100001	SXKD-6-UTP-PVC	Installation Cable Solarix CAT6 UTP PVC Eca 305m/box
27724160	SXKD-6-UTP-PVC	Installation Cable Solarix CAT6 UTP PVC Eca 100m/box
26000021	SXKD-6-UTP-LSOH	Installation Cable Solarix CAT6 UTP LSOH Dca-s2,d2,a1 500m/reel
26100021	SXKD-6-UTP-LSOH	Installation Cable Solarix CAT6 UTP LSOH Dca-s2,d2,a1 305m/box
27724161	SXKD-6-UTP-LSOH	Installation Cable Solarix CAT6 UTP LSOH Dca-s2,d2,a1 100m/box
26000033	SXKD-6-UTP-LSOHFR-B2ca	Installation Cable Solarix CAT6 UTP LSOHFR B2ca-s1,d1,a1 500m/reel
27655193	SXKD-6-UTP-PE	Installation Cable Solarix CAT6 UTP PE Fca Outdoor 500/reel